

J9726A Datasheet

[GetaQuote](#)

Overview

The Aruba J9726A is a member of the 2920 Series of network switching products and connected accessories. The 2920 Series is a Scalable Basic Layer 3 switch series that deliver modular stack, static & RIP routing, IPv6, ACLs, and sFlow for a better mobile-first campus network experience. Aruba J9726A 24 x 10/100/1000 PoE+ ports, 4 RJ-45 dual-personality 10/100/1000 PoE+ ports and 2 module slots for expansion. J9726A HPE 2920-48G-PoE+ Switch: Top Paragon Resource provides this Switch for sale in the USA and Malaysia. This HPE J9726A 2920-48G-PoE+ Switch we market is tech tested and set to defaults. We can immediately this HPE J9726A Switch to your location.


Product Code	J9726A
Type	Aruba 2920 48G POE+ Switch
Ports	· 44 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 dual-personality 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+) · 2 module slots · 1 stacking module slot · 1 dual-personality (RJ-45 or USB micro-B) · 1 USB 1.1 · 1 RJ-45 out-of-band management port
Throughput	130.9 million pps
Switching capacity	176 Gb/s
PoE power	370 W
Dimensions	4.39 x 44.25 x 33.6 cm (1.73 x 17.42 x 13.23 in)

HPE Aruba J9726A –Front



HPE Aruba J9726A

HPE Aruba J9726A –Back

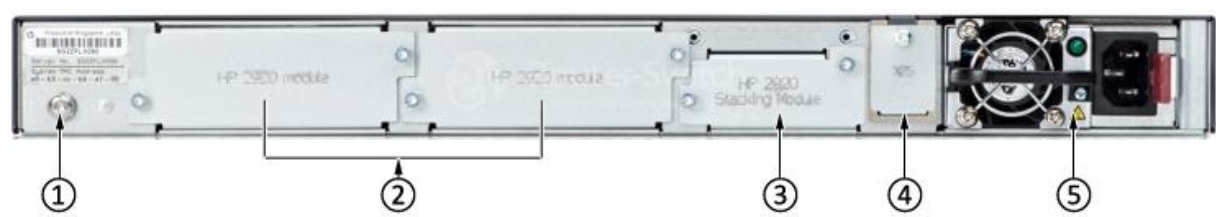

HPE Aruba J9726A

Compare to Similar Items

Product Code	J9726A	J9727A	J9728A	J9729A	J9836A
Type	Aruba 2920 24G Switch	Aruba 2920 24G POE+ Switch	Aruba 2920 48G Switch	Aruba 2920 48G POE+ Switch	Aruba 2920-48G-POE+ 740W Switch
Ports	· 20 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 dual-personality 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) · 2 module slots · 1 stacking module slot · 1 dual-personality (RJ-45 or USB micro-B) · 1 USB 1.1 · 1 RJ-45 out-of-band management port	· 20 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 dual-personality 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+) · 2 module slots · 1 stacking module slot · 1 dual-personality (RJ-45 or USB micro-B) · 1 USB 1.1 · 1 RJ-45 out-of-band management port	· 44 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 dual-personality 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) · 2 module slots · 1 stacking module slot · 1 dual-personality (RJ-45 or USB micro-B) · 1 USB 1.1 · 1 RJ-45 out-of-band management port	· 44 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 dual-personality 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+) · 2 module slots · 1 stacking module slot · 1 dual-personality (RJ-45 or USB micro-B) · 1 USB 1.1 · 1 RJ-45 out-of-band management port	· 44 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 dual-personality 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+) · 2 module slots · 1 stacking module slot · 1 dual-personality (RJ-45 or USB micro-B) · 1 USB 1.1 · 1 RJ-45 out-of-band management port
Throughput	95.2 million pps	95.2 million pps	130.9 million pps	130.9 million pps	130.9 million pps
Switching capacity	28 Gb/s	128 Gb/s	176 Gb/s	176 Gb/s	176 Gb/s
PoE Available Power	-	370 W	-	370 W	740 W

J9726A Specification

J9726A Specifications	
Model	Aruba 2920-24G Switch
Ports	24 RJ-45 autosensing 10/100/1000 ports
Switching capacity	128 Gbps
Throughput	up to 95.2 Mpps
MAC address table size	16000 entries
Frequency	50/60 Hz
Maximum heat dissipation	198 BTU/hr (208.89 kJ/hr)
Maximum power rating	58 W
Surge	IEC 61000-4-5
Management	Web browser, SNMP, CLI
Operating relative humidity	15% to 95%, non condensing
Form factor	Rack-mountable
Operating temperature	32°F to 131°F (0°C to 55°C)
Warranty	Limited lifetime warranty
Dimensions	17.42 (w) x 13.23 (d) x 1.75 (h) in